
Precast Concrete Manhole (48" ID) Sanitary Sewer (Eccentric Cone, Extended Bottom & Invert, Steps)

Inlet & Outlet pipe shall be joined to the manhole with a gasketed flexible watertight connection that allow differential settlement of pipe & manhole wall to take place. (A-lok Gasket)

SPECIFICATIONS:

ASTM C478 Concrete: 4000 PSI (Min.) Approx. Wt./LinFt: 870 Lbs. Joint O-Ring Gasket



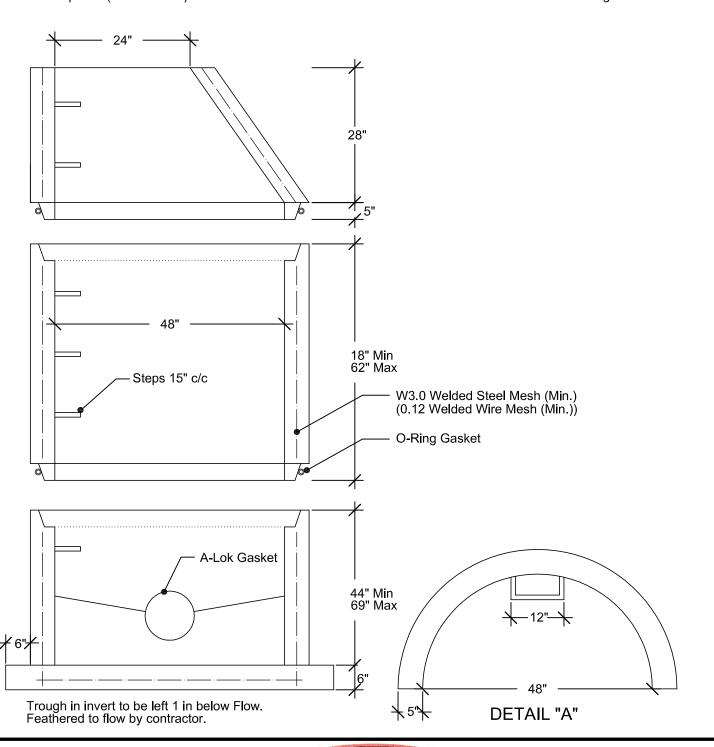

2100 NORTH 161ST E. AVE. TULSA, OKLAHOMA 74116

OFC: (918) 438-1182 WWW.GNCCONCRETEPRODUCTS.COM FAX: (918) 438-1185