
## Precast Concrete Manhole (96" ID) Sanitary Sewer (Ext. Bottom & Invert, Flat Top & Steps)

Openings for inlets & outlets are made to the OD of the intrusions, providing a water tight and flexible joint. These gaskets are located as required per plans.

## SPECIFICATIONS:

ASTM C478 Concrete: 4000 PSI (Min.) Approx. Wt./LinFt: 3090 Lbs. Joint O-Ring Gasket

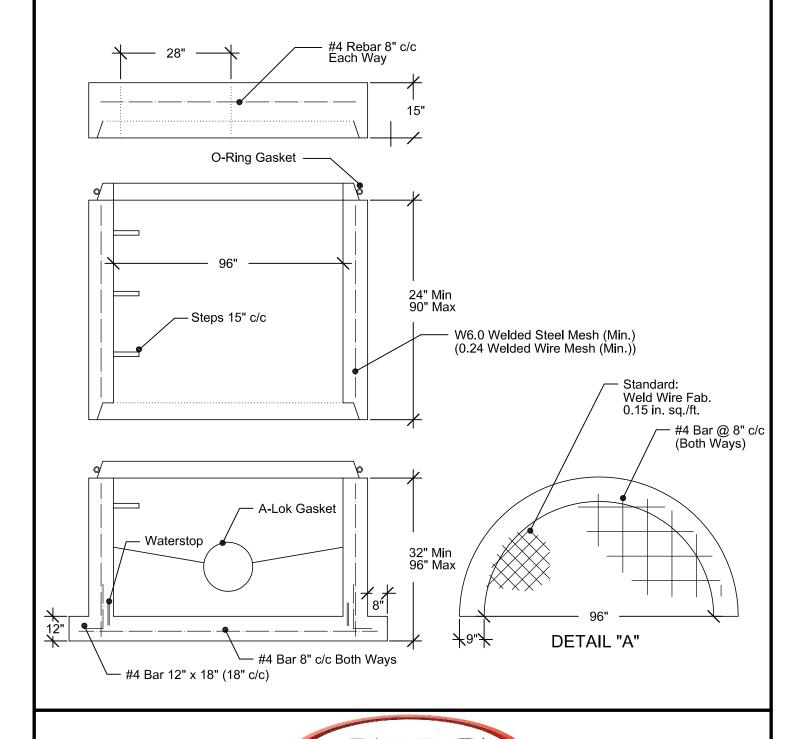

2100 NORTH 161ST E. AVE. TULSA, OKLAHOMA 74116

WWW.GNCCONCRETEPRODUCTS.COM

OFC: (918) 438-1182 FAX: (918) 438-1185